

Absolutely no tolerance allowed in concrete dimensions. Quality must be of highest standard


Undefined:
Water can penetrate behind the epoxy layer

Silicone seal on site

- No safety reserve during water testing. Testing only carried out using existing water pressure
- No pressure testing possible for later injection/maintenance

GRP/EPOXY

- Adhesion of silicone to the epoxy fibre glass coating has been proven to be less durable than to stainless steel
- GRP is not crack-bridging, which can lead to leaks when the concrete settles.

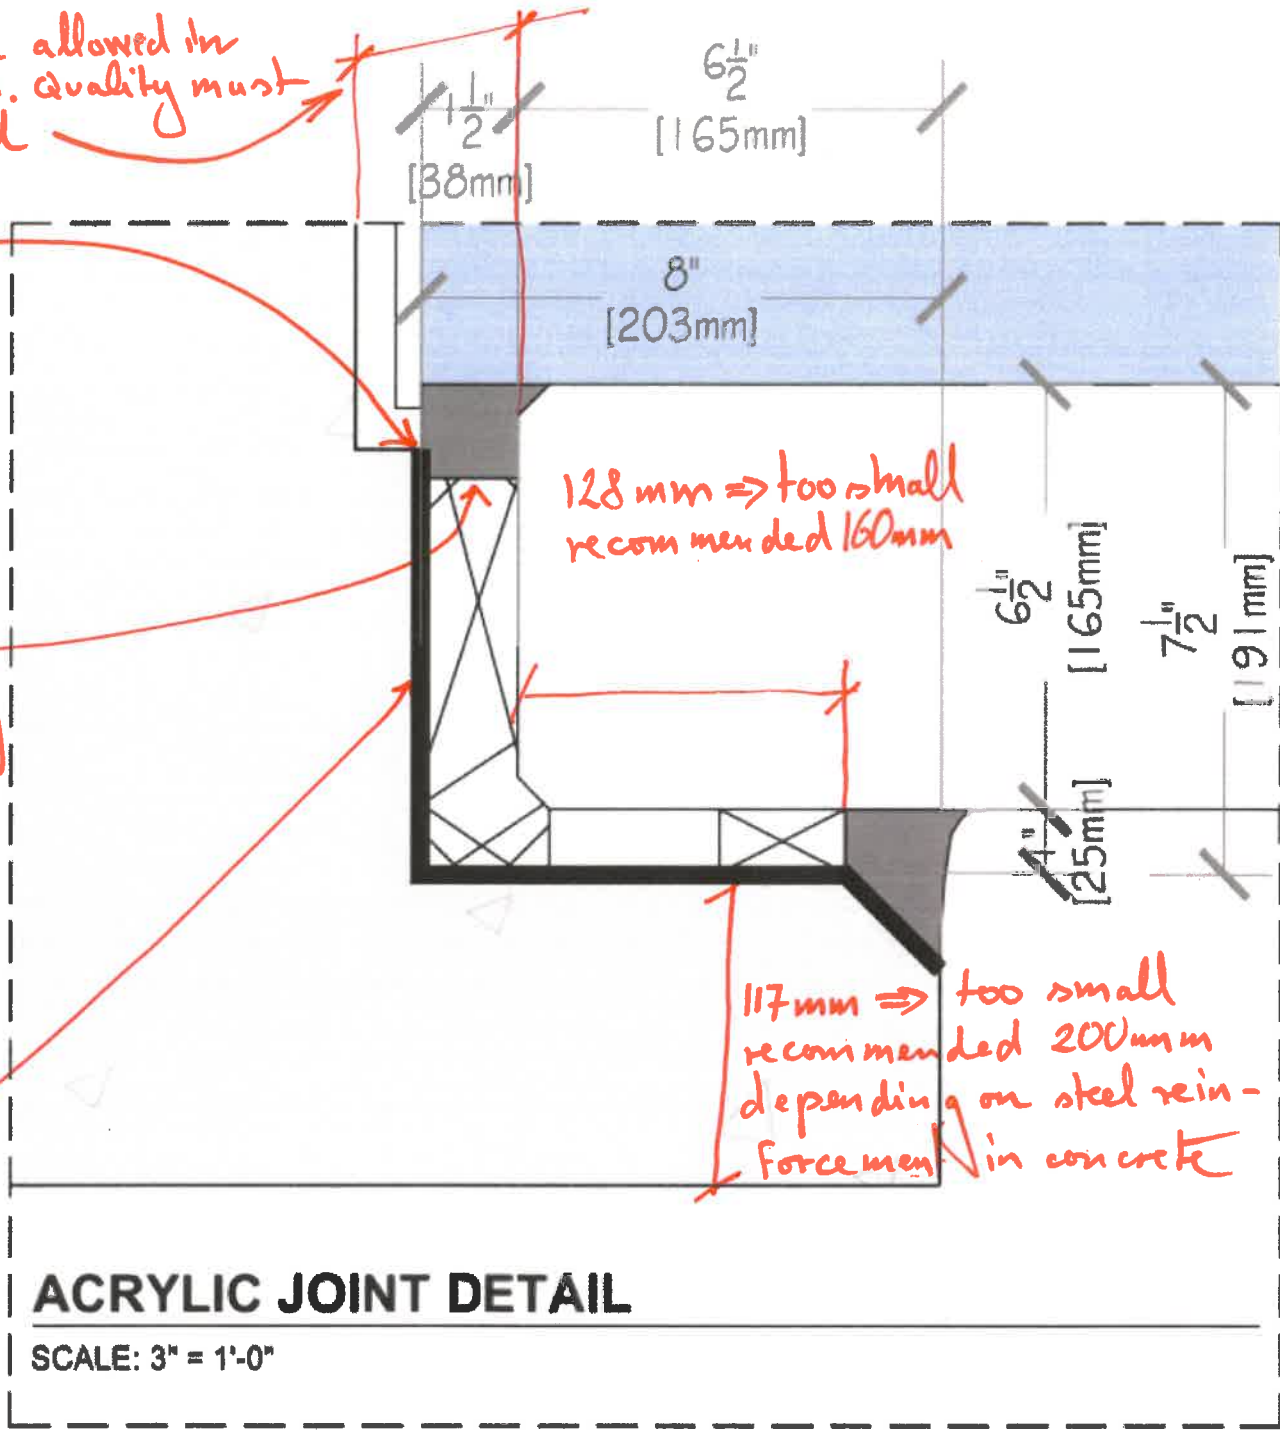

28.05.25
P. T. Reinert